
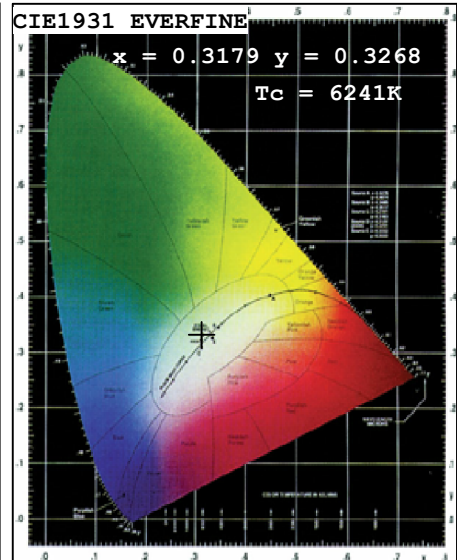


Light Source Test Report

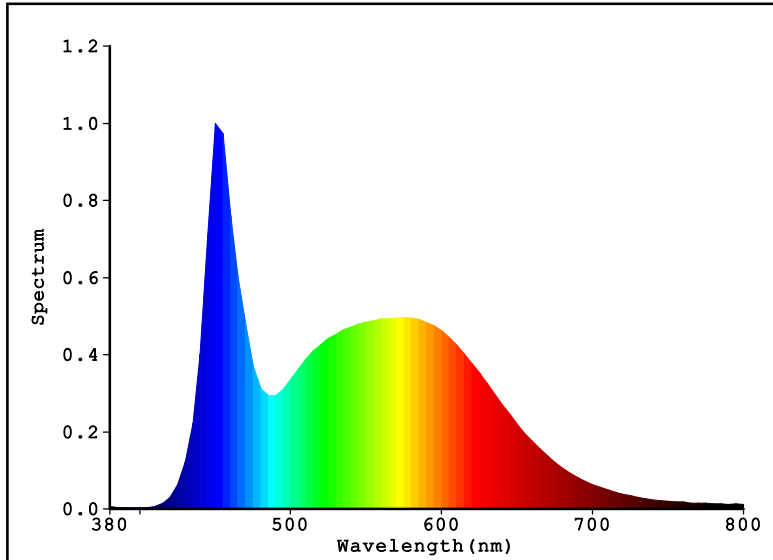

Color Parameters:

Chromaticity Coordinate: $x=0.3179$ $y=0.3268$ $u'=0.2023$ $v'=0.4679$
 $T_c=6241K$ Dominant WL: $L_d=486.1nm$ Purity=5.7% Centroid WL: $543.0nm$
 Ratio: R=15.7% G=78.7% B=5.6% Peak WL: $L_p=450.0nm$ HWL: $27.7nm$
 Render Index: $R_a=86.3$
 R1 =86 R2 =92 R3 =93 R4 =85 R5 =86 R6 =86 R7 =89
 R8 =74 R9 =25 R10=79 R11=84 R12=62 R13=88 R14=97 R15=83

Photo Parameters:

Flux: 2171.4 lm Fe: 7.2340 W Efficacy: 109.8 lm/W
 LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U=220.2V I=0.09309A P=19.77W PF=0.9643

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] $I_p=15347 (G=3, D=51)$
 REF=11790 (R=3) $\% = 0.180\%$ PMT: 30.7 centigrade [29.7]

Product Type: L06G
 Number: L06G2065T1200-2163528R8
 Temperature: 25.3 deg
 Test Operator: QC
 Software: V2.00.100

Manufacturer: ERVAN
 Test Department: ERVAN
 Humidity: 65.0%
 Test Date: QC
 Instrument: PMS-80_V1 (SN:1004010)