







LED uniform line Luminaire Manual

 **IP44 IK07**





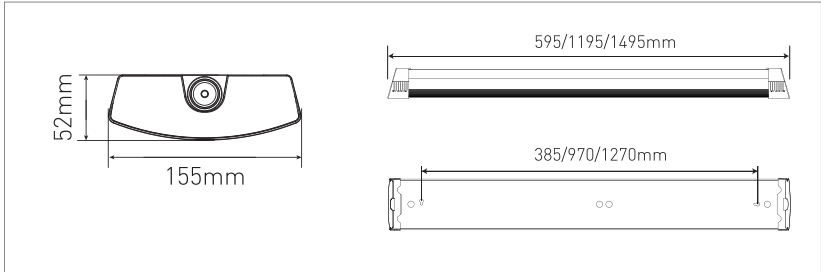




General Safety Information

- Installation, commissioning and maintenance only by qualified electrician.
- Never perform any work on the luminaire with voltage applied. Danger to life due to electric shock!
- Electric connection must be appropriate according to all applicable standards and other national and international safety and accident prevention regulations.
- Damaged luminaires must not be operated.
- Observe and retain safety instructions and mounting instructions
- No liability is accepted for damages resulting from improper use.
- Use genuine parts only for repair.

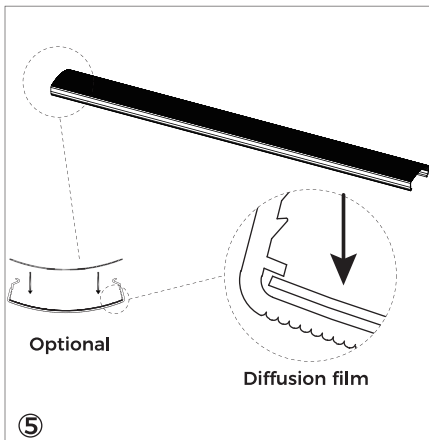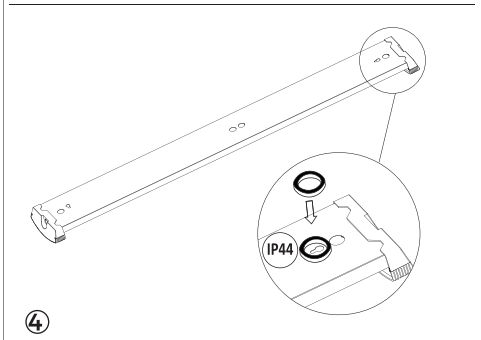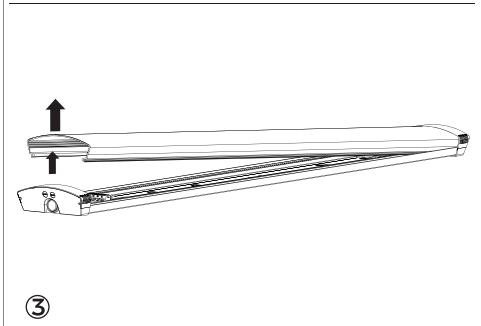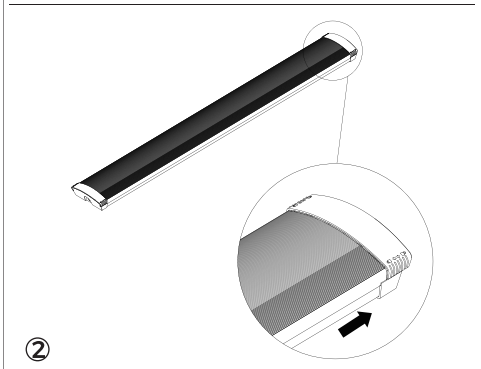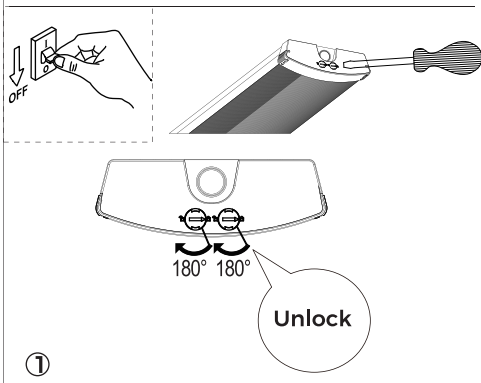

CCT&Power adjustable

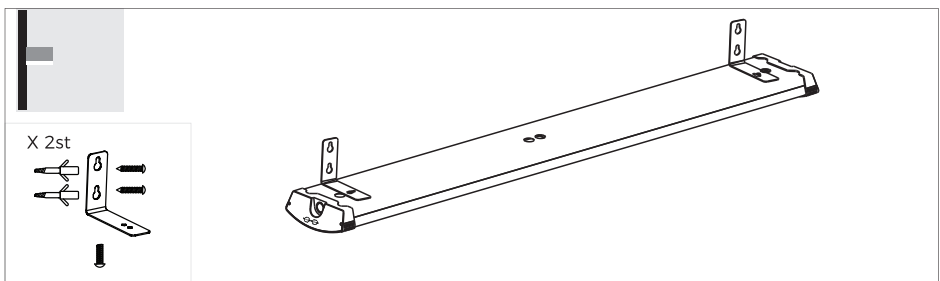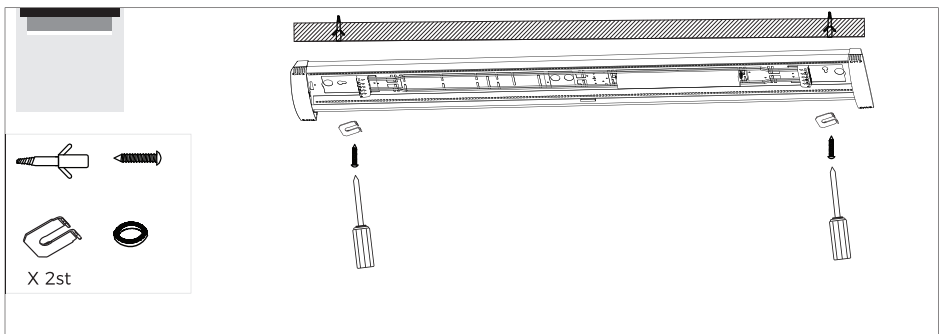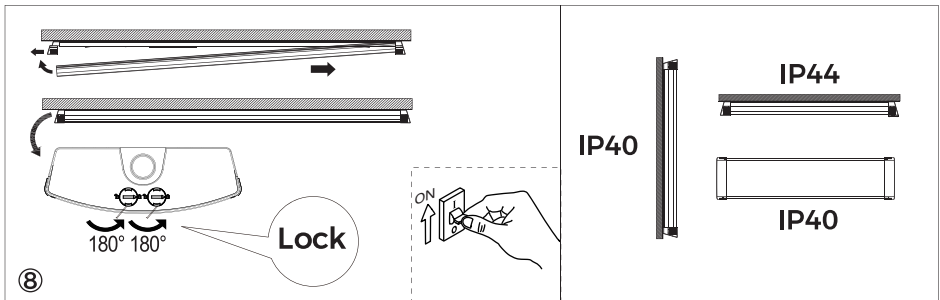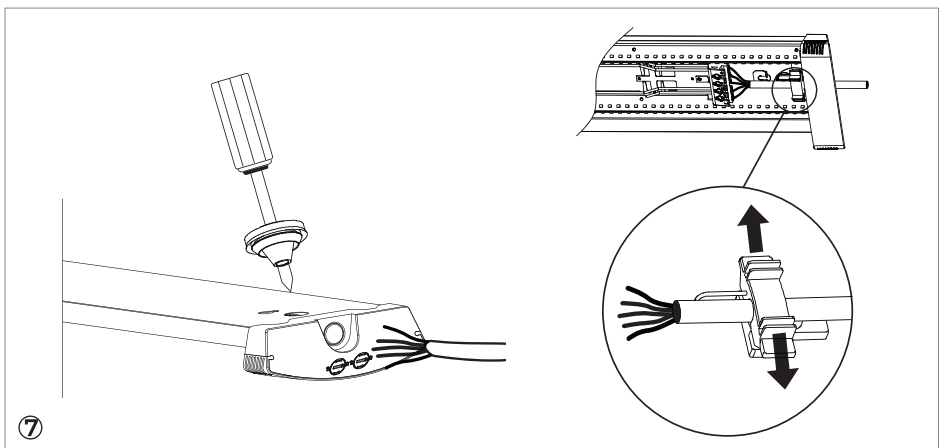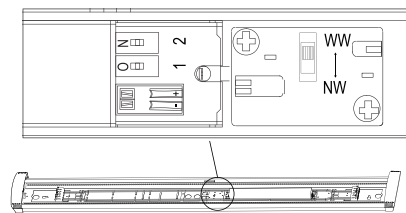

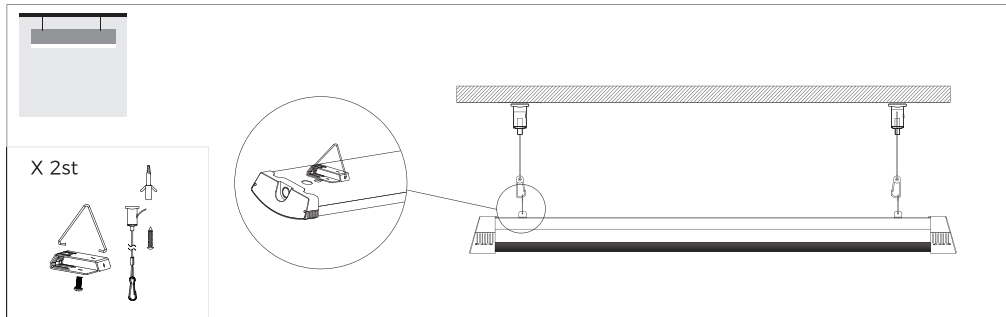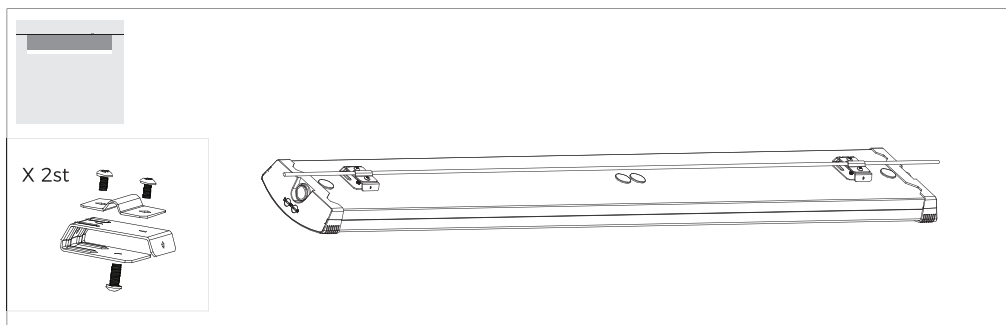

Dimmable

Dim+
Dim-
E
N
L

DALI

DA
DA
E
N
L

3 wires

L
E
N

5 wires

L2
L1
E
N
L3

Emergency

N
E
L',
L

L for emergency permanent live wire
L' for switch live wire

Circuit breakers

1 2 3 ... n

	B10	B16	C10	C16
20W	40	46	65	108
40W	33	56	38	60
47W	20	34	31	50

Linkable qty

2x ...nx

Input Voltage	SIZE	NX	NX	NX	NX
230VAC	600mm	109(11W)	92(13W)	75(16W)	60(20W)
230VAC	1200mm	52(23W)	41(29W)	34(35W)	30(40W)
230VAC	1500mm	46(26W)	36(33W)	30(40W)	26(47W)

CCT	EET
4000/5000K	B
3000/6500K	C

Replaceable (LED only) light source by a professional.

Replaceable control gear by a professional.

This product contains a light source of energy efficiency class .(4000K/5000K)
This product contains a light source of energy efficiency class <C>.(3000K/6500K)

Replacement steps :

A: Loosen the end cap and remove the diffuser;
B: Screw out the fixing screws on PCB board and LED driver;
C: Replace the LED module and driver with new one;
D: Put back the diffuser and lock the end cap.

Replace the driver

Replace LED module