
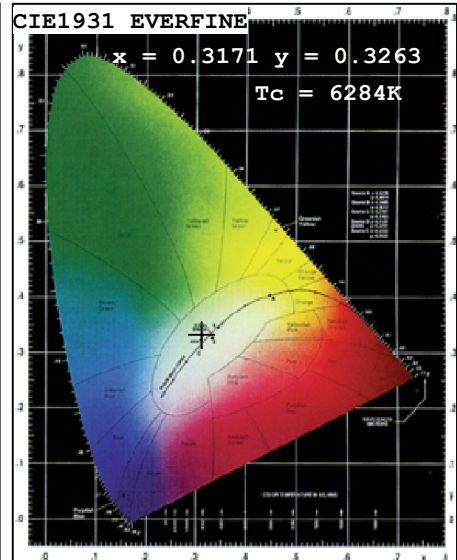


### Light Source Test Report

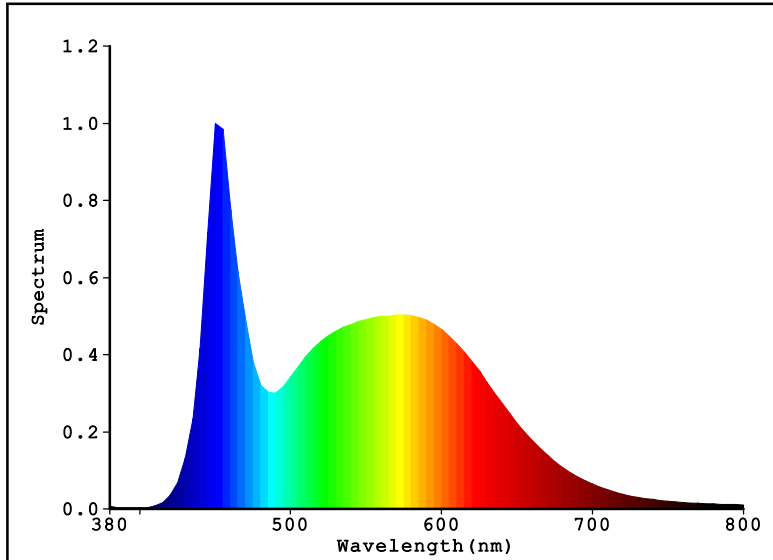

#### Color Parameters:

Chromaticity Coordinate:  $x=0.3171$   $y=0.3263$   $u'=0.2019$   $v'=0.4675$   
Tc=6284K Dominant WL:Ld=486.0nm Purity=6.0% Centroid WL:542.0nm  
Ratio:R=15.6% G=78.7% B=5.6% Peak WL:Lp=450.0nm HWL:28.3nm  
Render Index:Ra=86.3  
R1 =86 R2 =92 R3 =93 R4 =85 R5 =86 R6 =86 R7 =89  
R8 =74 R9 =25 R10=79 R11=84 R12=62 R13=88 R14=97 R15=83

#### Photo Parameters:

Flux: 2419.9 lm Fe: 8.0719 W Efficacy:106.6 lm/W  
LEVEL: WHITE:OUT

#### Electrical Parameters:

Luminaire: U=220.2V I=0.1066A P=22.71W PF=0.9675

#### Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=17067(G=3,D=52)  
REF=13125(R=3) %=0.246% PMT: 30.6 centigrade [30.0]

Product Type:L06G  
Number:L06G2465T1500-2403528R8  
Temperature:25.3 deg  
Test Operator:QC  
Software:V2.00.100

Manufacturer:ERVAN  
Test Department:ERVAN  
Humidity:65.0%  
Test Date:QC  
Instrument:PMS-80\_V1 (SN:1004010)