

LEDline pro





Inspired by the Nordic minimalist design language, strong and simple appearance achieves the quality product texture. The scientific design makes the application of the product perfect: 5 or 7 wires through available, compatible with various functions such as DALI, 1~10V dimming, Emergency and sensor. Suitable for all kinds of ceiling mounted and suspending, multiple beam angle options meets professional optic requests.





Features

- Nordic strong design.
- Flexible installation.
- 5 or 7 wires through available.
- DALI, 1~10V DIM, Emergency, sensor available.
- 60°and 120°beam angle optional.

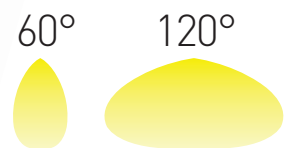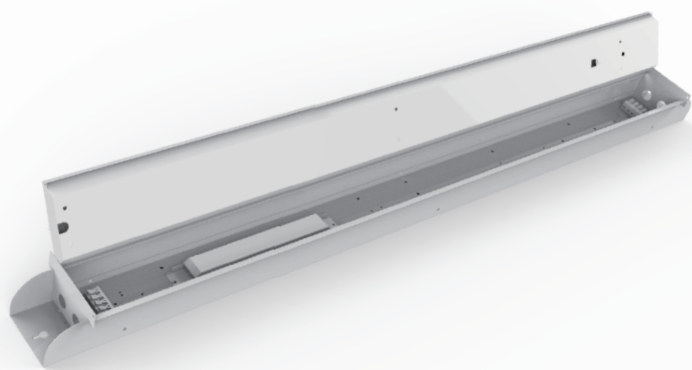

Product Dimension

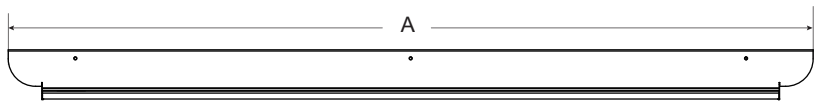

Model NO.	Size A(mm)	Size B(mm)	Size C(mm)
LPRO-1200	1320mm	114.4	80.7
LPRO-1500	1620mm	114.4	80.7

Parameter

Model NO. / Length	Power (W)	Lumens	Frost cover (Lm/W)	Lumens	60° Lens (Lm/W)
LPRO / 1200mm	40	6000	150	6400	160
LPRO / 1200mm	60	9000	150	9600	160
LPRO / 1500mm	60	9000	150	9600	160
LPRO / 1500mm	80	12000	150	12800	160
LPRO / 1500mm	100	15000	150	16000	160



Dimmable



Tridonic sensor


Notes:

- Above lumens based on 4000K Ra : 80
- All values in +25°C ambient temperature, luminous flux tolerance +-5%, output power tolerance +-5%.

AC Input : 220-240V 50/60Hz
Light Source : 2835 SDCM<5
CRI Range : 80
CCT Range : WW(3000K) NW(4000K) DW(5000K) CW(6500K)
Light Efficiency : 150Lm/W, 160Lm/W
Beam Angle : 60°/120°
L70B10 @Ta 25°C : 78000h L70B50 @Ta 25°C : 91000h
Size(mm) : 114.4(W)*80.7(H)
Recommended Installation Height : 3-15M
PF:≥0.93 THD<20% Power Efficiency:≥0.87
Temperature : (Storage : -30~+65°C) (Operating : -20~+40°C)

Standard Installation

■ Wiring

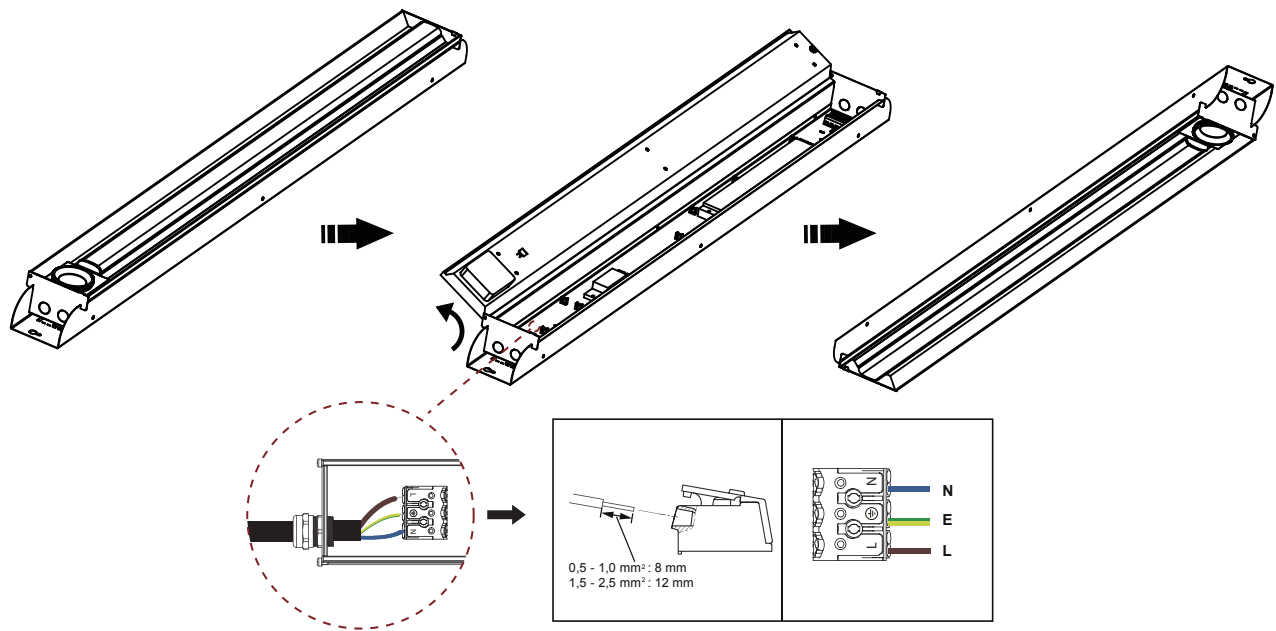


■ How many LED fixtures we could connect on one phase.


Input Voltage	Max Qty	Size Cable(mm)
230VAC/40W	18	5x1.5²
230VAC/60W	12	5x1.5²
230VAC/80W	9	5x1.5²
230VAC/100W	7	5x1.5²

■ Installation

Ceiling Mounted

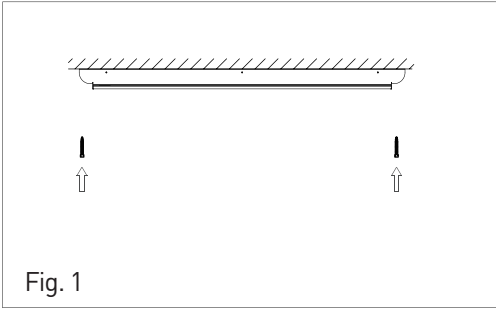

Wire suspension

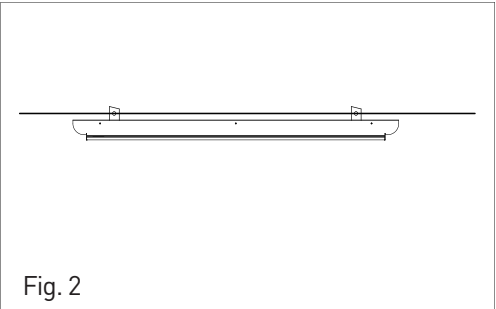


Accessory part number matrix



Accessories	IMAGE	DESIGNTION	MATERIAL	DESCRIPTION	QUANTITY	ACCESSORY USE
Standard	01	Screw	Stainless steel	4X20mm	2PCS	Used for the absorption of Ceiling Mounted
Standard	02	M20 Connector	PC	Length of thread:8mm	2PCS	Dimension : 8mm<Cable<12mm
Standard	03	Wall Plug	Nylon	6X30mm	4PCS	Used for the absorption of Ceiling Mounted

Packaging

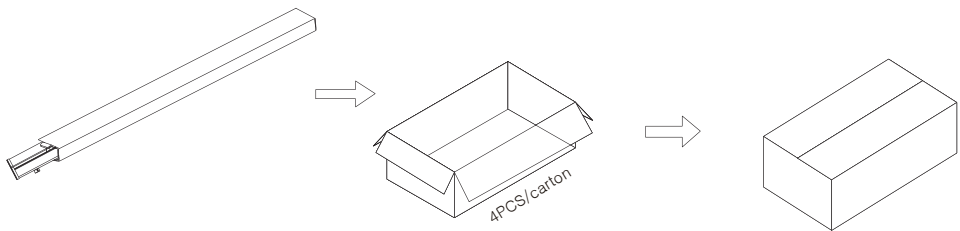

A.Packing list

Sequence Number	Model NO.	Quantity
1	LED Luminaire	1pcs
2	Screw	2pcs
3	M20 Connector	2pcs
4	Manual	1pcs

B.Packing Data

Model No	Single Box	Pcs/CTN	N.W(kg)	G.W./CTN(kg)	Meas(mm)
LPRO-1200	1	4	4.54	21.8	1389x328x270
LPRO-1500	1	4	5.54	26.00	1689x328x270

Attention

This specification is for reference only,we reserve the right to change without notice.If you need the updated info,please contact local distributors or visit our website at <http://www.ervan.cn>

This product is non-resistant to some chemical substances,please contact the manufacturer for the details.

ERVAN reserves the right of final explanation.