


Light Source Test Report

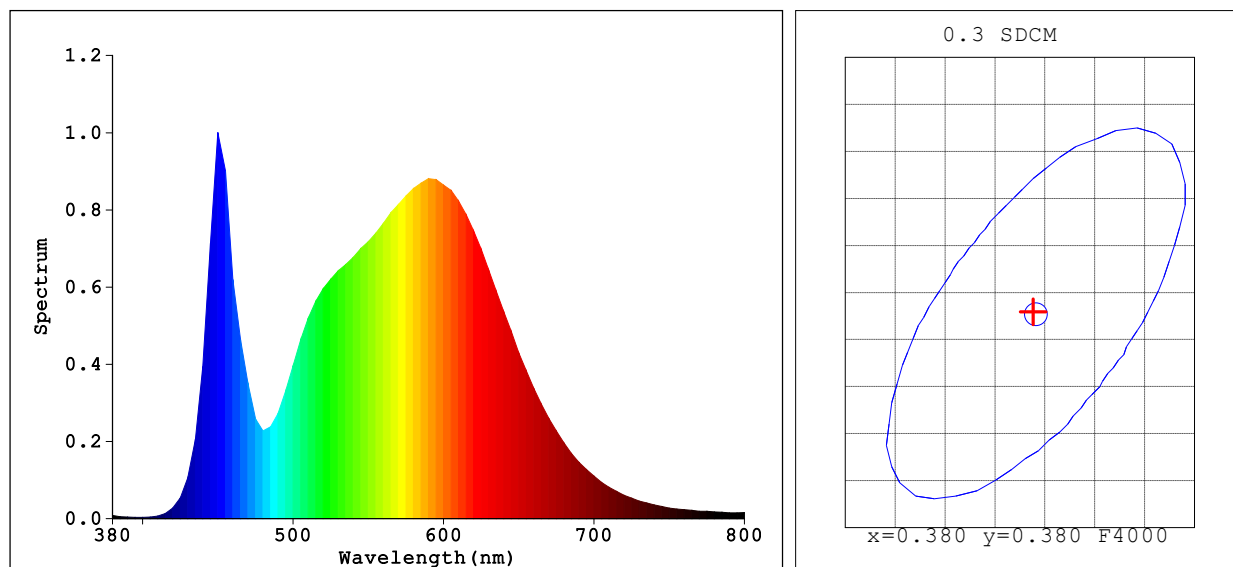

Color Parameters:

Chromaticity Coordinate: $x=0.3797$ $y=0.3802$

Chromaticity Coordinate: $u'=0.2233$ $v'=0.5030$ ($duv=1.82e-03$)

$T_c=4044K$ Dominant WL: $L_d=577.9nm$ Purity=28.1% Centroid WL: 569.0nm

Ratio: R=19.3% G=77.6% B=3.1% Peak WL: $L_p=450.0nm$ HWL: 22.2nm

Render Index: $R_a=81.4$

R1 =79 R2 =88 R3 =94 R4 =80 R5 =79 R6 =83 R7 =86

R8 =63 R9 =2 R10=70 R11=79 R12=56 R13=81 R14=97 R15=73

Photo Parameters:

Flux: 3653.4 lm Fe: 10.967 W Efficacy: 160.2 lm/W

Electrical Parameters:

Luminaire: U=230.9V I=0.1028A P=22.81W PF=0.9607

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]

REF=13951 (R=3) $\%=-0.065\%$

$I_p=15695$ (G=3, D=51)

PMT: 27.1 centigrade [24.7]

L60B-24W-1200 (26)

Product Type: L60B
Number: 7
Temperature: 25.3 deg
Test Operator: QC
Software: V2.00.125

Manufacturer:
Test Department:
Humidity: 65.0%
Test Date: 2019-02-22 19:38:21
Instrument: PMS-80_V1 (SN: 1004010)