


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.96 lm/W			
MODEL		I _{max} (cd)	1856	S/MH (C0/180)	1.22
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH (C90/270)	1.46
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	4331.5	η UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	4331.51	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

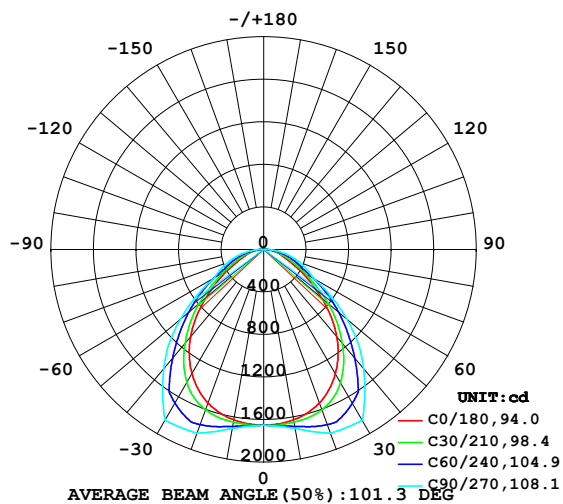

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

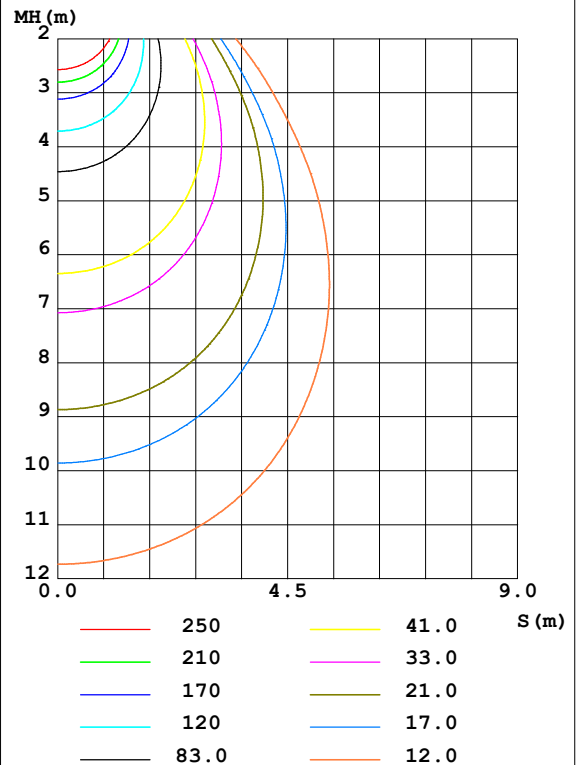

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1627	1670	1709	1670	1627	1670	1709	1670	0- 10	158.7	158.7	3.66,3.66
20	1536	1676	1838	1676	1536	1676	1838	1676	10- 20	476.2	634.8	14.7,14.7
30	1349	1547	1856	1547	1349	1547	1856	1547	20- 30	757.0	1392	32.1,32.1
40	1070	1256	1463	1256	1070	1256	1463	1256	30- 40	891.2	2283	52.7,52.7
50	711.4	849.0	1023	849.0	711.4	849.0	1023	849.0	40- 50	817.8	3101	71.6,71.6
60	393.3	480.8	536.5	480.8	393.3	480.8	536.5	480.8	50- 60	594.5	3695	85.3,85.3
70	197.4	212.6	359.3	212.6	197.4	212.6	359.3	212.6	60- 70	357.4	4053	93.6,93.6
80	98.09	101.5	180.2	101.5	98.09	101.5	180.2	101.5	70- 80	208.5	4261	98.4,98.4
90	1.427	1.889	1.994	1.889	1.427	1.889	1.994	1.889	80- 90	70.38	4332	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QC
 Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:53.0%
 Test Distance:10.380m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

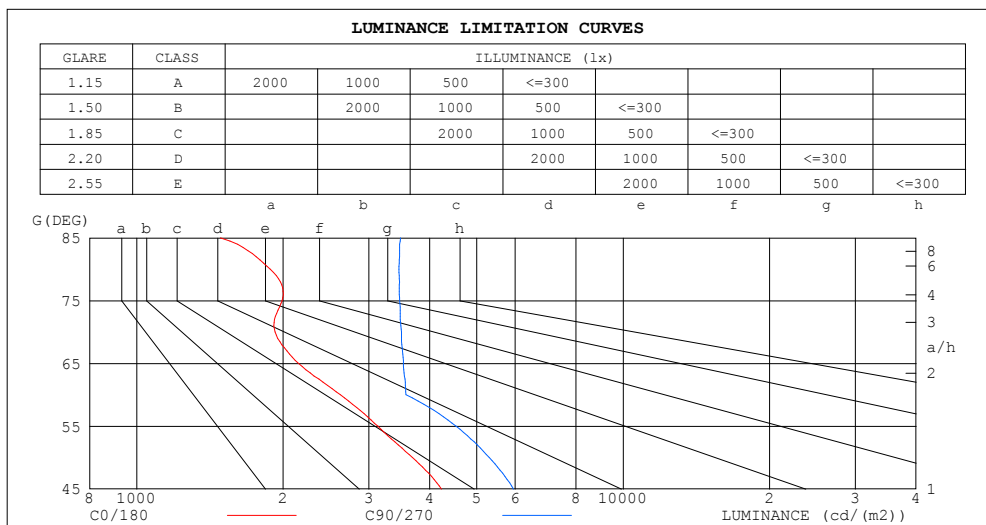

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1486	3487
80	1883	3458
75	1990	3472
70	1924	3502
65	2149	3533
60	2622	3576
55	3128	4534
50	3689	5305
45	4233	5948


C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
 γ Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.01	.98	1.03	.90	.96	.99	.96	.93	.95	.93	.90	.91	.90	.88	.86
2.0	.93	.87	.81	.91	.85	.81	.88	.83	.79	.84	.80	.77	.81	.78	.75	.73
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.73	.65	.59	.70	.63	.58	.68	.62	.57	.66	.61	.57	.55
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.60	.54	.50	.48
6.0	.60	.52	.46	.59	.51	.45	.57	.50	.45	.56	.49	.45	.54	.49	.44	.42
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.51	.45	.40	.50	.44	.40	.38
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
9.0	.46	.38	.33	.46	.38	.33	.44	.37	.33	.43	.37	.32	.42	.37	.32	.30
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.39	.34	.29	.28

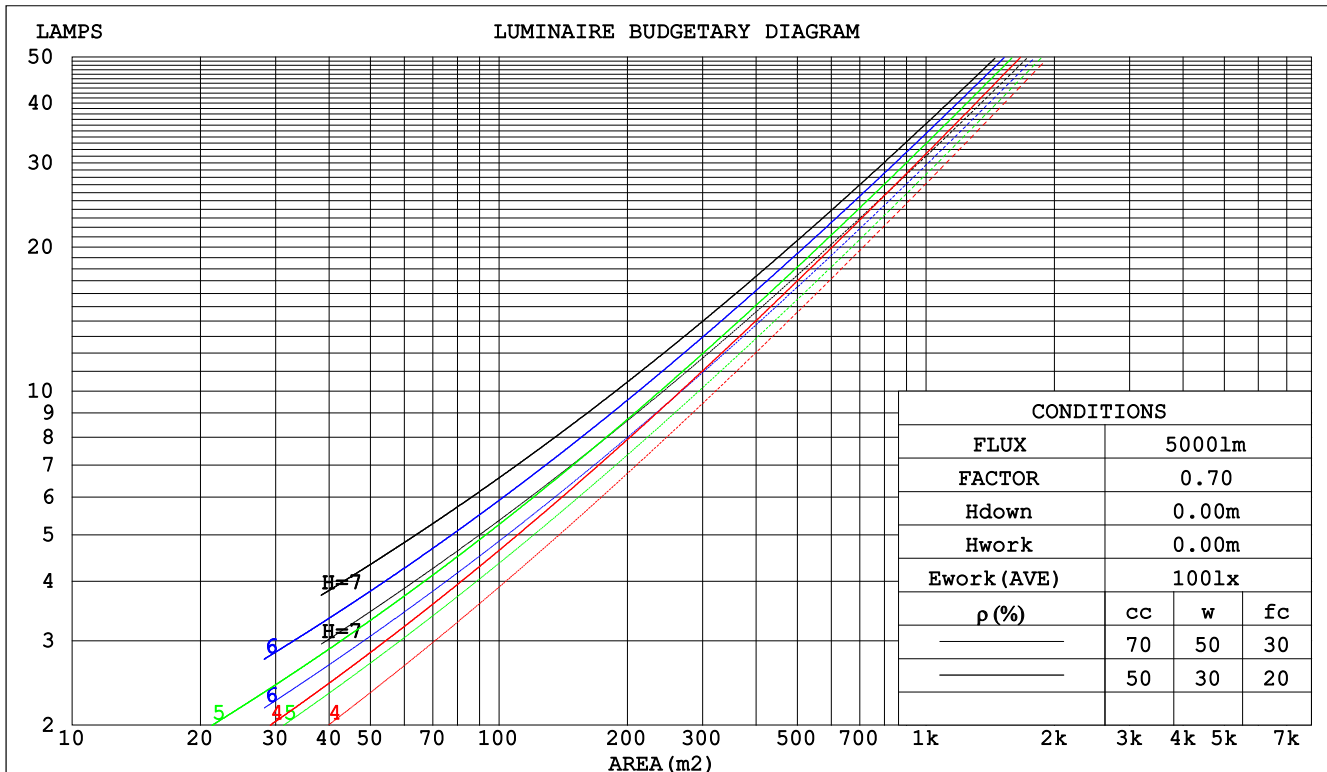

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QC
 Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:53.0%
 Test Distance:10.380m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.282	.160	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.238	.138	.045		
2.0	.267	.146	.045	.261	.144	.044	.249	.138	.043	.238	.134	.042	.229	.129	.041		
3.0	.249	.132	.040	.244	.130	.039	.233	.127	.038	.224	.123	.038	.215	.119	.037		
4.0	.232	.120	.035	.227	.119	.035	.218	.116	.035	.210	.113	.034	.202	.110	.033		
5.0	.216	.110	.032	.212	.109	.032	.204	.106	.031	.196	.104	.031	.190	.101	.030		
6.0	.202	.101	.029	.198	.100	.029	.191	.098	.028	.184	.096	.028	.178	.094	.028		
7.0	.189	.093	.026	.186	.092	.026	.179	.091	.026	.173	.089	.026	.168	.087	.026		
8.0	.177	.087	.024	.174	.086	.024	.169	.084	.024	.163	.083	.024	.158	.081	.024		
9.0	.167	.081	.023	.164	.080	.022	.159	.079	.022	.154	.077	.022	.150	.076	.022		
10.0	.158	.076	.021	.155	.075	.021	.151	.074	.021	.146	.073	.021	.142	.072	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.153	.134	.118	.104	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.169	.132	.101	.145	.114	.087	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.160	.114	.077	.138	.098	.067	.094	.068	.047	.055	.040	.028	.018	.013	.009	
4.0	.153	.101	.061	.131	.087	.053	.090	.061	.037	.052	.035	.022	.017	.012	.007	
5.0	.145	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006	
6.0	.138	.082	.041	.119	.071	.036	.082	.049	.025	.048	.029	.015	.015	.010	.005	
7.0	.132	.075	.035	.113	.065	.030	.078	.045	.021	.045	.027	.013	.015	.009	.004	
8.0	.126	.069	.030	.108	.060	.026	.075	.042	.018	.043	.025	.011	.014	.008	.004	
9.0	.120	.064	.026	.103	.055	.023	.071	.039	.016	.042	.023	.010	.013	.008	.003	
10.0	.114	.060	.023	.099	.052	.020	.068	.036	.014	.040	.022	.009	.013	.007	.003	

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm										
NAME: P17ES-UC-36-0606B-30H-1684014R8					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVRAN					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.1	12.6	11.4	12.8	13.0	12.8	14.2	13.1	14.4	14.6
3H	11.9	13.2	12.2	13.5	13.7	14.0	15.3	14.3	15.5	15.7
4H	12.3	13.5	12.6	13.8	14.0	14.5	15.8	14.9	16.0	16.3
6H	12.6	13.8	12.9	14.1	14.3	15.1	16.2	15.4	16.5	16.8
8H	12.7	13.8	13.0	14.1	14.4	15.3	16.4	15.6	16.7	17.0
12H	12.7	13.8	13.1	14.1	14.4	15.4	16.5	15.8	16.8	17.1
4H 2H	11.6	12.8	11.9	13.1	13.3	13.0	14.2	13.3	14.5	14.7
3H	12.5	13.6	12.9	13.9	14.2	14.3	15.4	14.7	15.7	16.0
4H	13.1	14.1	13.4	14.4	14.7	15.1	16.1	15.5	16.4	16.7
6H	13.6	14.4	14.0	14.8	15.1	15.8	16.7	16.2	17.0	17.4
8H	13.7	14.5	14.1	14.9	15.3	16.1	16.9	16.5	17.3	17.7
12H	13.8	14.5	14.2	14.9	15.3	16.3	17.1	16.8	17.5	17.9
8H 4H	13.3	14.1	13.7	14.5	14.9	15.2	16.0	15.6	16.4	16.7
6H	13.9	14.6	14.4	15.0	15.4	16.0	16.7	16.5	17.1	17.5
8H	14.2	14.8	14.7	15.2	15.7	16.5	17.1	16.9	17.5	17.9
12H	14.4	14.9	14.9	15.4	15.8	16.8	17.3	17.3	17.8	18.3
12H 4H	13.3	14.1	13.8	14.5	14.9	15.2	15.9	15.6	16.3	16.7
6H	14.0	14.6	14.5	15.0	15.5	16.1	16.7	16.5	17.1	17.5
8H	14.3	14.8	14.8	15.3	15.8	16.5	17.0	17.0	17.5	17.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.4 / - 0.8					+ 0.6 / - 0.6				

CIE Pub.117, 4332 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 5.1$)

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	62	51	45	61	51	45	60	51	44	38
0.80	72	61	55	71	61	55	69	60	54	48
1.00	80	70	64	79	70	63	77	71	63	56
1.25	87	78	71	86	77	71	83	76	70	63
1.50	92	83	77	90	82	76	87	80	75	68
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	93	102	97	92	98	94	90	82
4.00	108	103	98	105	101	97	101	98	94	86
5.00	110	105	102	107	104	100	103	100	97	88
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: QC
 Test Date: 2019-09-09

γ Range: -90 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 53.0%
 Test Distance: 10.380m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

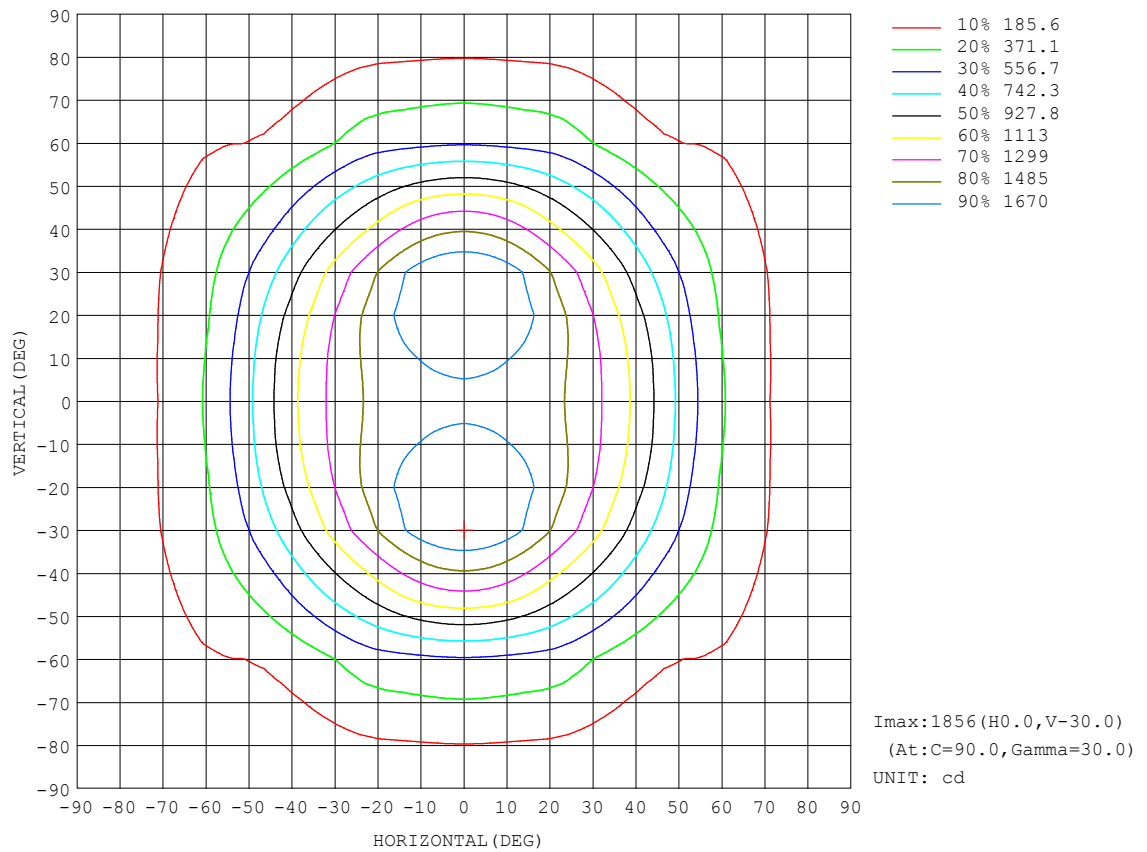


C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

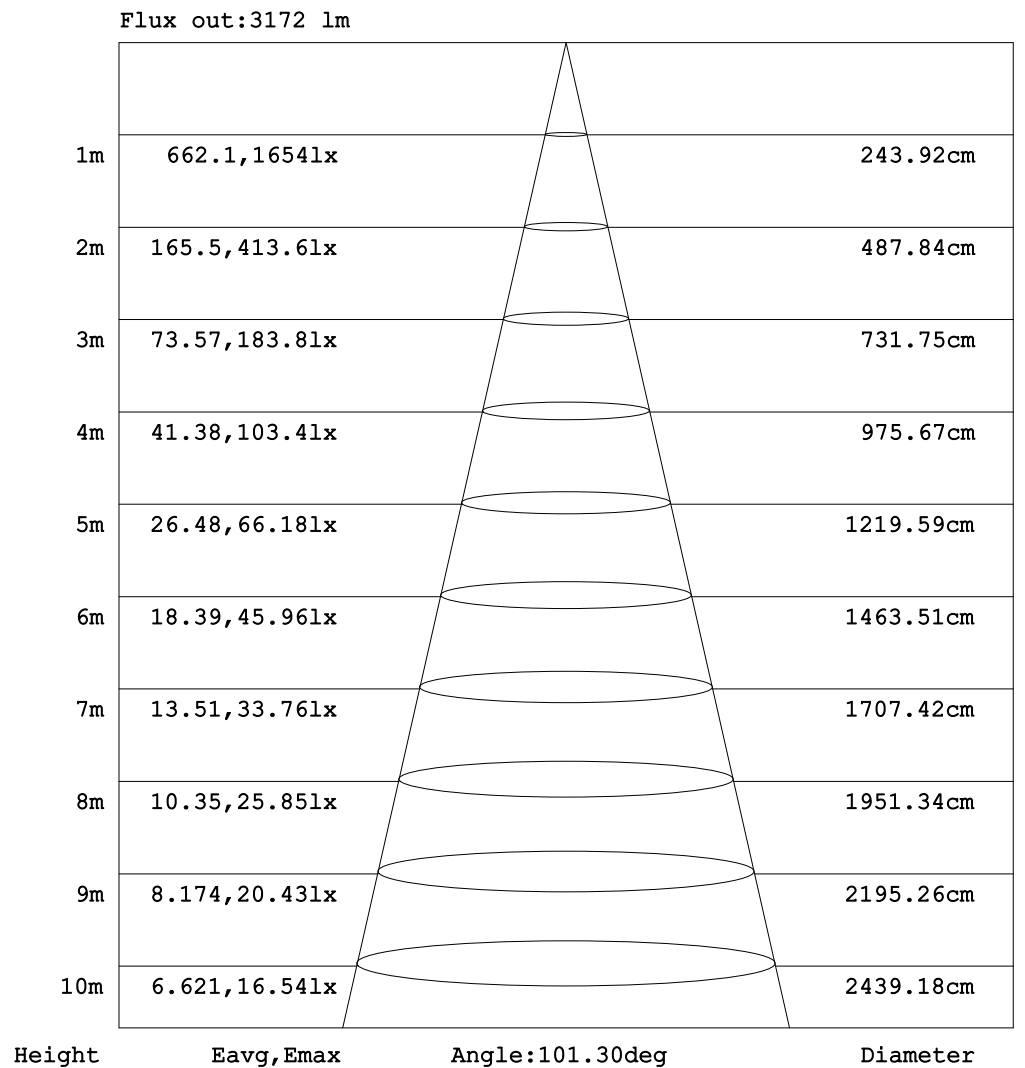


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QC
 Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:53.0%
 Test Distance:10.380m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

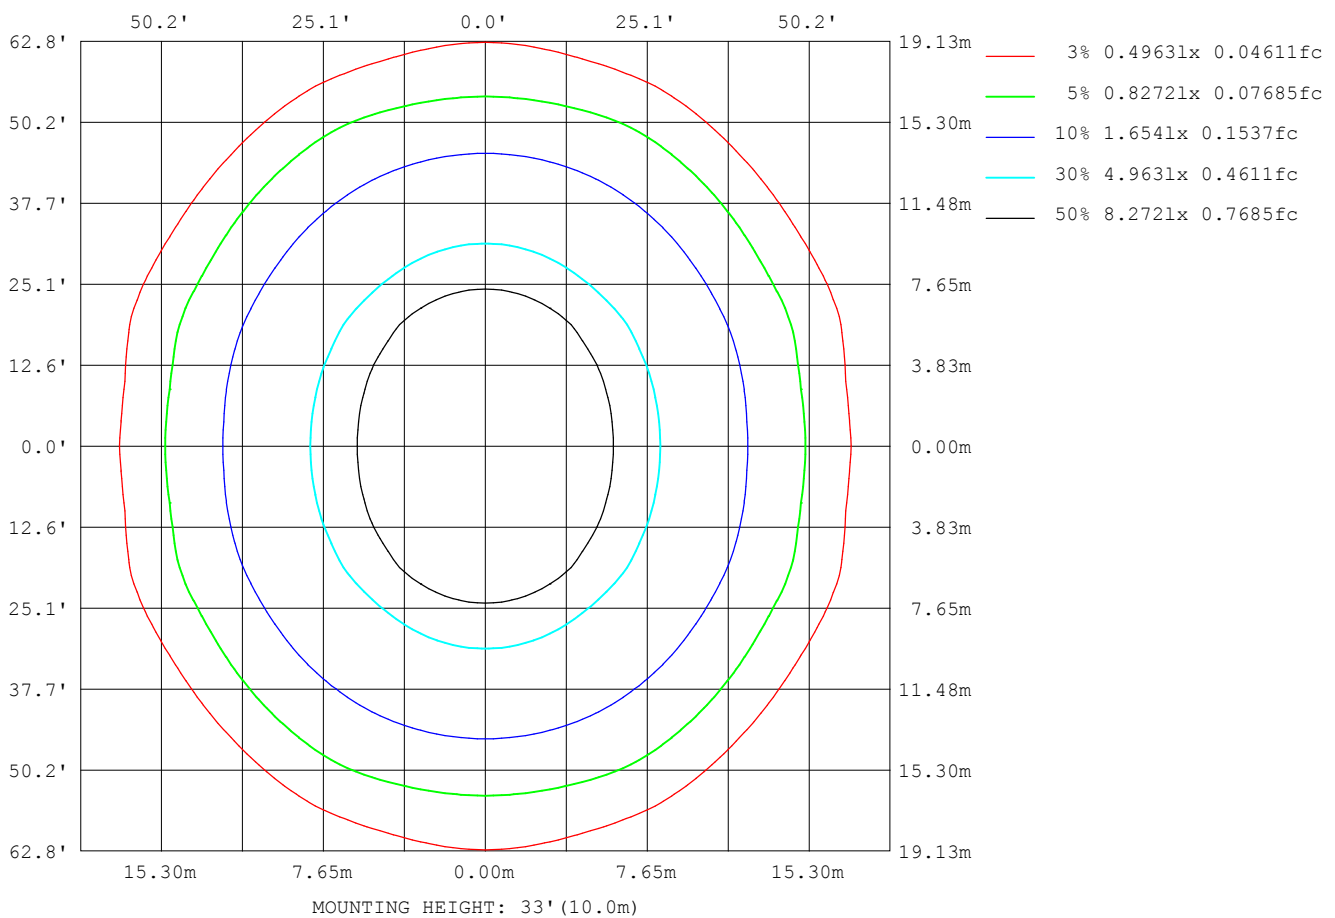

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2149
L_0~180 (75) av	1990
L_0~180 (85) av	1486
L_90~270 (65) av	3533
L_90~270 (75) av	3472
L_90~270 (85) av	3487
L_45 (65) av	2533
L_45 (75) av	1990
L_45 (85) av	1947

Standard: GB/T 29293-2012

C Range: 0 - 90DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QC
 Test Date:2019-09-09

γ Range:-90 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:53.0%
 Test Distance:10.380m [K=1.0000]
 Remarks:

Planar Illuminance Curve

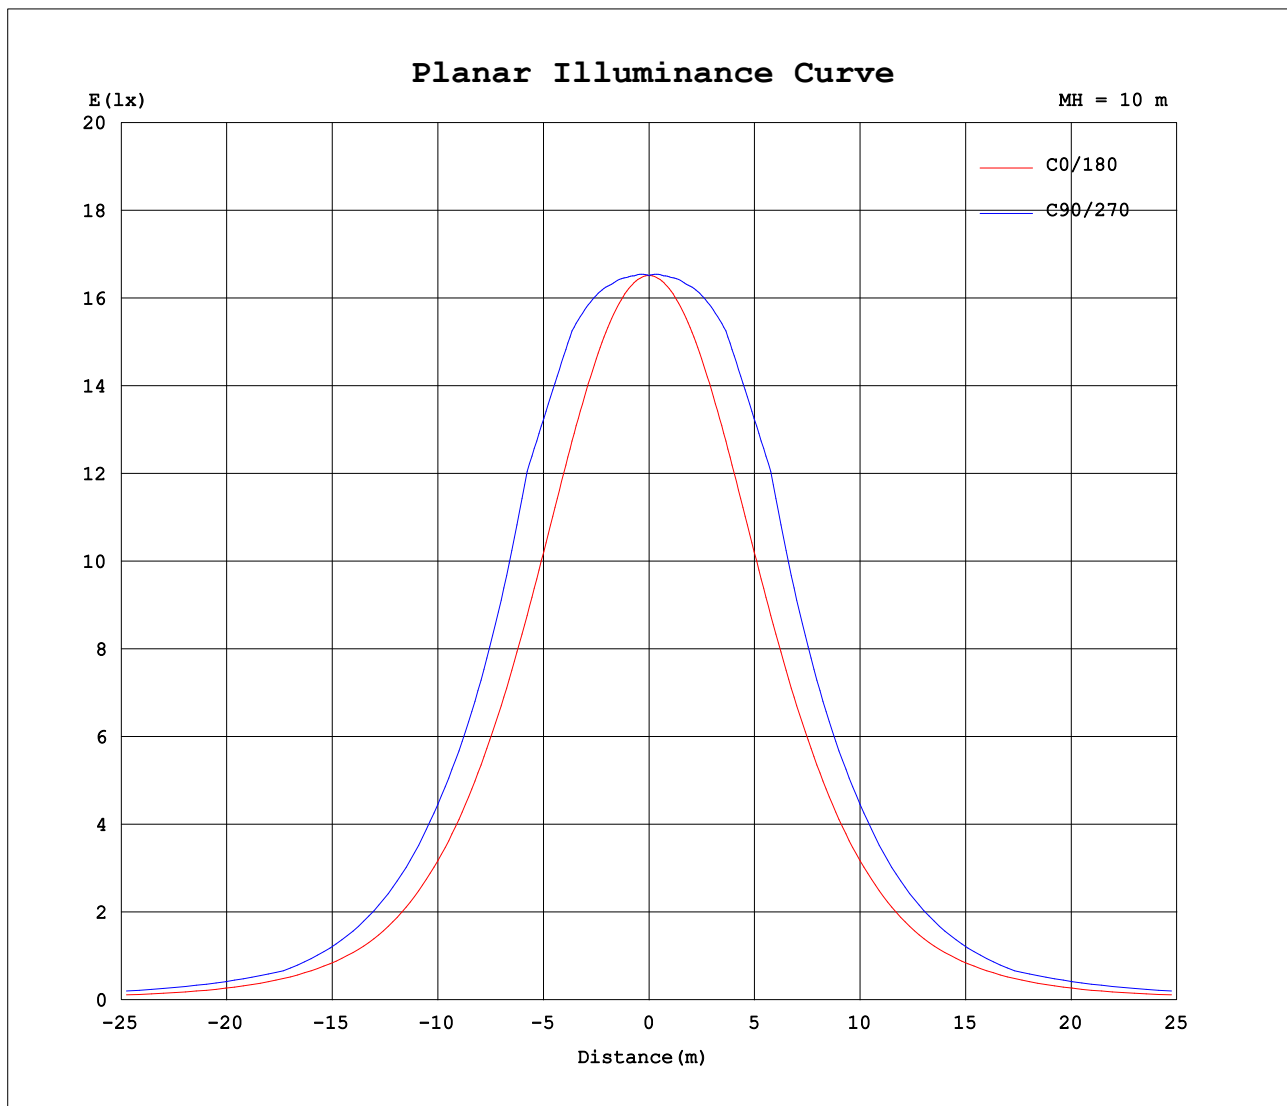

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: QC
Test Date: 2019-09-09

γ Range: -90 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 53.0%
Test Distance: 10.380m [K=1.0000]
Remarks:

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

UNIT: cd

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

Table--2

UNIT: cd

[illegible]

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

UNIT: cd

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

Test:U:230.3V I:0.1642A P:36.41W PF:0.9630 Freq:49.99Hz Lamp Flux:4331.51x1 lm		
NAME: P17ES-UC-36-0606B-30H-1684014R8	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVRAN	SUR.:	Shielding Angle:

UNIT: cd

C Range: 0 - 90DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QC
Test Date:2019-09-09

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```


[illegible]

```

√ Range:-90 - 90DEG
√ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

[illegible]

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

[illegible]

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```

[illegible]

```

γ Range:-90 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:53.0%
Test Distance:10.380m [K=1.0000]
Remarks:

```