3.Accessory



Blade Version Tri-proof

Matters needing attention

Before installing the lighting fixtures, please read this instruction manual carefully.

The lighting fixtures should be installed, connected and tested by a certified installer based on the local regulations.

Lamps should always be installed or replaced with care.

Please check the local voltage in accordance with the product requirements before using the product.

Relamping only can be done when the power is off and the lamp is completely cooled down.

When a lamp is to be cleaned, make the power off and let it cool down completely.Clean the fixture with a soft cloth and a standard PH neutral detergent. Stainless steel finishing should be maintained regularly.

Misuse of, or changes to the fixture shall nullify the guarantee.

Don't cover the fixtures with flammable materials.

Temperature

Operating -20~+40°C

Storage -40~+85 C

Exclusively replaced by the manufacturer or his service agent or the similar qualified person in order to avoid a hazard.

Temperature Characteristics T-ambient 25°C

Electrical Characteristics

Input Voltage:


AC220-240V 50/60Hz PF:≥0.93 THD<20% Power Efficiency:≥0.9

01


1.Product Dimension




Standard




Through-wiring

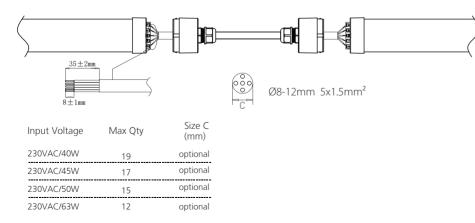


2.Installation







3 Hook installation

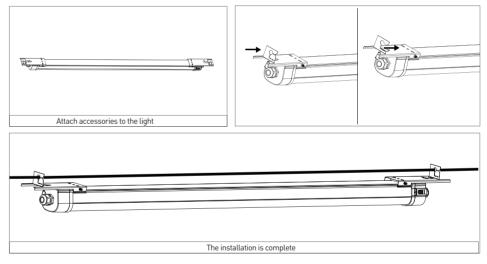

- Please Note:All the operations must be in the condition of power off
- The luminaires are intended for indoor use. If you don't understand anything, please consult the sales staff.