


# UNILINE44--NU28

<https://www.ervan.cn>

Uniform line NU28 is a flexible and slim luminaire with IP44 for multiple indoor application such as parking garages, schools, offices, culverts, laundry rooms, kitchens and industrial buildings. . Very uniform opal cover makes perfect optic performance. It is suitable for surface mounted or wall mounted, rails bracket mounting, horizontal wires and wire suspension..

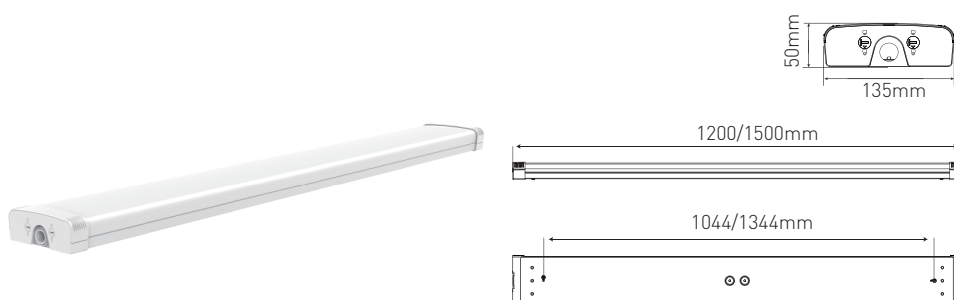

## Mechanical Characteristics

Certification	CE / Rohs / D mark
Ingress protection rating(IP)	IP44
Impact resistance(IK)	IK07
Ambient temperature	-20~40°C
Protective class	Class I
Glow wire	850°C
Profile	White coating sheet metal+ PC cover
Terminal connector	3/5 terminal connector
Cable entry	One cable entry at each endcap and two top entries at the back of the luminaire
Housing color	White
Weight(Net)	1200mm(1.9kg) 1500mm(2.42kg)
Installation	Surface mounted; Cable wire; Wire suspension; Wall mounted

## Electrical Characteristics


Electrical Characteristics										
Wiring	3/5wires; 3/5x1.5mm <sup>2</sup> wires through; 3/5x2.5mm <sup>2</sup> wires through									
Power	1200mm 22-28-34-39W (power adjustable) 1500mm 29-37-44-52W (power adjustable)									
Mains voltage	AC220~240V 50/60Hz									
Power factor	≥0.9									
THD	<20%									
Flicker factor	<1%									
SVM	<0.4									
Pst	<1									
Function	DALI PUSH Dim   1-10V Dim   SENSOR   Emergency									
Circuit breakers	39W	B10	B16	C10	C16	52W	B10	B16	C10	C16
		17	27	24	39		12	19	17	28

## Photometrical Characteristics

Single CCT	3000K、4000K、5000K、6500K
CCT adjustable	3000K / 4000K
CRI	80~95
Luminous flux	1200MM 2860-3640-4420-5070LM (lumen adjustable) 1500MM 3770-4810-5720-6760LM (lumen adjustable)
Luminous efficacy	130LM/W
SDCM	3
Beam angle	130°
Service life	L80B10:100000H
Photobiological safety	RG0



# Optics



# Accessories

## Material



## Description

Surface mounting kits

Suspension kits

Wall mounting kits

Horizontal cable wire suspension kits