


## Light Source Test Report

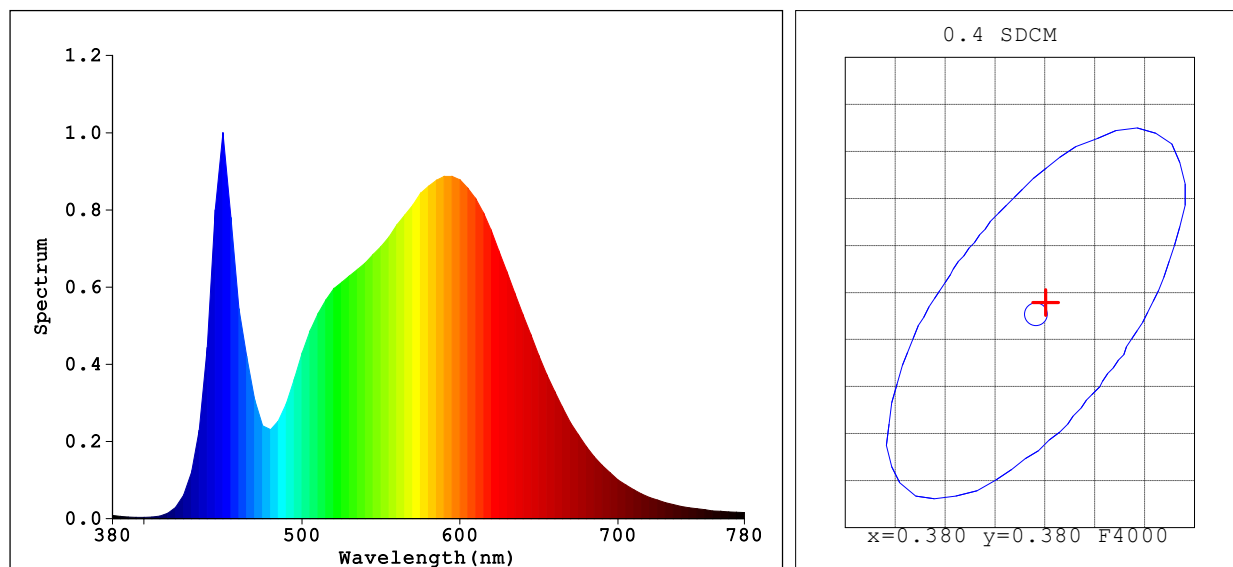

## Color Parameters:

Chromaticity Coordinate:  $x=0.3808$   $y=0.3810$ Chromaticity Coordinate:  $u'=0.2237$   $v'=0.5035$  ( $duv=1.86e-03$ )

Tc=4021K Dominant WL:Ld=578.0nm Purity=28.6% Centroid WL:569.0nm

Ratio:R=19.4% G=77.5% B=3.1% Peak WL:Lp=450.0nm HWL:21.0nm

Render Index:Ra=81.4

R1 =79 R2 =88 R3 =95 R4 =81 R5 =79 R6 =83 R7 =85

R8 =61 R9 =-1 R10=71 R11=80 R12=59 R13=81 R14=97 R15=72

## Photo Parameters:

Flux: 7447.1 lm Fe: 22.203 W Efficacy:153.1 lm/W

## Electrical Parameters:

Luminaire: U=230.2V I=0.2257A P=48.63W PF=0.9360

## Instrument Status:

Scan Range:380.0nm-780.0nm Interval:5.0nm[0]

REF=13957(R=3)

%=-0.094%

Ip=19831(G=3,D=51)

PMT: 27.0 centigrade [25.7]

Product Type:Ti60L-CC-48-1500K-40H

Number:23

Temperature:25.3 deg

Test Operator:IPQC

Software:V2.00.125

Manufacturer:

Test Department:QC

Humidity:65.0%

Test Date:2023-05-12 10:40:37

Instrument:PMS-80\_V1 (SN:1004010)